



Smarter pipeline solutions

Introducing the new Waterworks Butterfly Valves

Buy with confidence and peace of mind in a high quality valve.

Available in:

- Both lugged and wafer configuration.
- Sizes 50 - 300mm (400mm gearbox only).
- All sizes available with gear-box operator.

Lugged valves have Table E flange configuration and wafer valves have a universal bolt pattern.

Epoxy coated cast iron body.


Complies with BS5155.



Lockable lever with 10 position stainless steel notch plate for optimum flow control.

Maximum nominal working pressure 16Bar / 230PSI.

316 grade stainless steel disc.

EPDM liner rated to 120°C. Suitable for hot water, steam, alcohols, coolants, acids & bases.

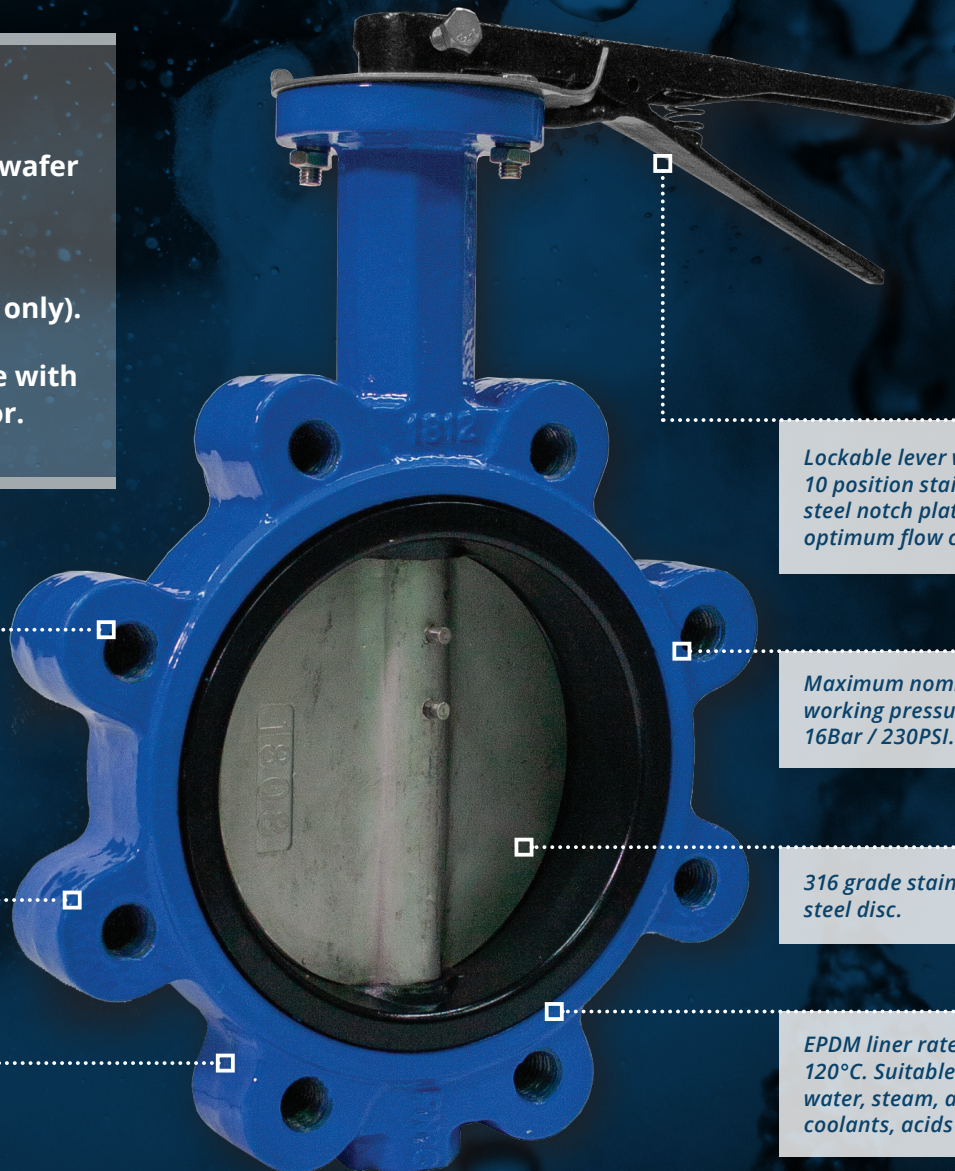

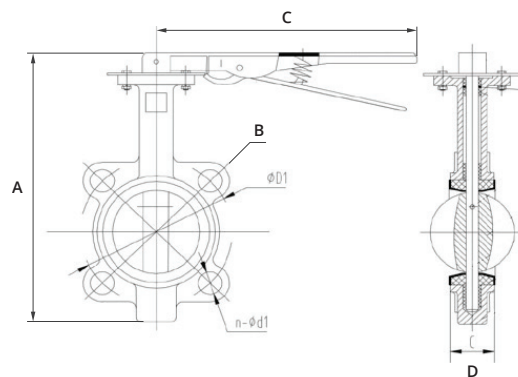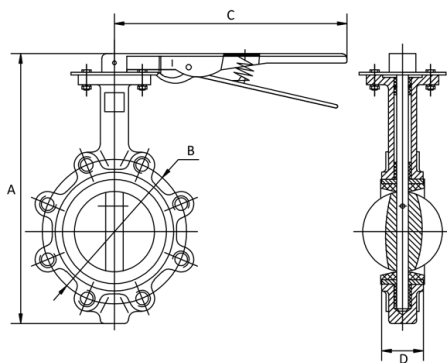

Lugged Cast Iron Butterfly Valve - SS Disc

- Cast iron, stainless steel disc
- Table E threaded stud pattern
- Maximum nominal working pressure 230 PSI / 16 Bar
- EPDM seal temperature rating 120°C
- EPDM is suitable for hot water, steam, alcohols, coolants, acids and bases
- Lockable lever with 10 position stainless steel notch plate

Part No.	Nominal Size	A	B	C	D
BFV50L	50	252	114	220	42
BFV65L	65	296	127	220	44.7
BFV80L	80	308	146	220	45.2
BFV100L	100	346	178	255	52.1
BFV125L	125	349	210	255	54.4
BFV150L	150	397	235	255	55.8
BFV200L	200	480	292	358	60.6
BFV250L	250	540	356	358	65.6
BFV300L	300	592	406	500	76.9

Wafer Cast Iron Butterfly Valve - SS Disc

- Cast iron, stainless steel disc
- Wafer bolt pattern
- Maximum nominal working pressure 230 PSI/16 Bar
- EPDM seal temperature rating 120°C
- EPDM is suitable for hot water, steam, alcohols, coolants, acids and bases
- Lockable lever with 10 position stainless steel notch plate
- 400mm comes with a gearbox option only

Part No.	Nominal Size	A	B	C	D
BFV50W	50	235	114	220	42
BFV65W	65	239	127	220	44.7
BFV80W	80	285	146	220	45.2
BFV100W	100	322	178	255	52.1
BFV125W	125	349	210	255	54.4
BFV150W	150	383	235	255	55.8
BFV200W	200	455	292	358	60.6
BFV250W	250	513	356	358	65.6
BFV300W	300	592	406	500	76.9

LUGGED CAST-IRON BUTTERFLY VALVES SS DISC, EPDM SEAL C/W GEARBOX

BFV50L-GB	50mm
BFV65L-GB	65mm
BFV80L-GB	80mm
BFV100L-GB	100mm
BFV125L-GB	125mm
BFV150L-GB	150mm
BFV200L-GB	200mm
BFV250L-GB	250mm
BFV300L-GB	300mm



WAFER CAST-IRON BUTTERFLY VALVES SS DISC, EPDM SEAL C/W GEARBOX

BFV50W-GB	50mm
BFV65W-GB	65mm
BFV80W-GB	80mm
BFV100W-GB	100mm
BFV125W-GB	125mm
BFV150W-GB	150mm
BFV200W-GB	200mm
BFV250W-GB	250mm
BFV300W-GB	300mm
BFV400W-GB	400mm



Enquire now for your pricing 0800 387 677



Smarter pipeline solutions

Experience unparalleled service...it works.

e: info@waterworks.co.nz w: www.waterworks.co.nz

