



# Polypropylene and Nyglass BSP Threaded Fittings

# Polypropylene and Nyglass BSP Threaded Fittings

## Design

Polypropylene and Nyglass BSP Threaded fittings provide a reliable and durable connection in a range of industries and applications. Some fittings in this range are made from Polypropylene, a thermoplastic polymer with excellent chemical resistance, low moisture absorption and durability, and others are made from Nyglass. Nyglass is a glass-reinforced nylon material made from a blend of nylon and glass fibres. These offer durability, resistance to harsh weather conditions, are relatively lightweight and easy to handle and simplify the installation process.

## Material

Polypropylene/Nyglass.

## Sizes

Available in sizes 15mm-100mm.

## Applications

Effluent, Compressed air, Irrigation, and Water reticulation.

## Pressure Rating

15mm-50mm - PN16 and 65mm to 100mm - PN10.

## Temperature Range

The pressure rating must be de-rated if the temperature increases above 20°C.


## Installation Notes

Thread sealant is applied around the threads, and the fittings are screwed together – forming a strong, leakproof seal.

## Threads


BSP threaded connections which comply with British standard pipe thread specifications.



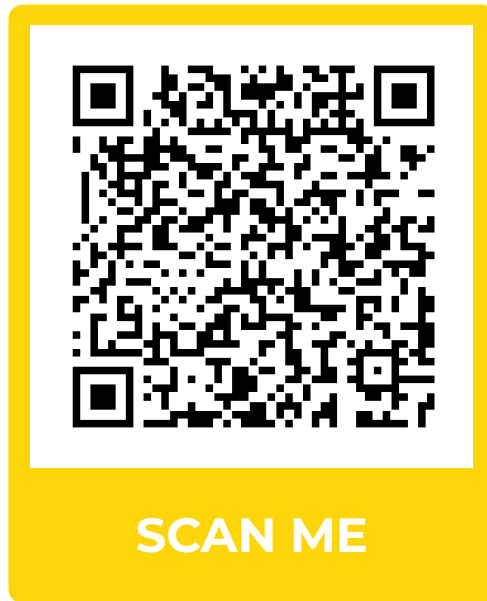

**Scan the QR code to view our Polypropylene and Nyglass BSP Threaded Fittings online.**



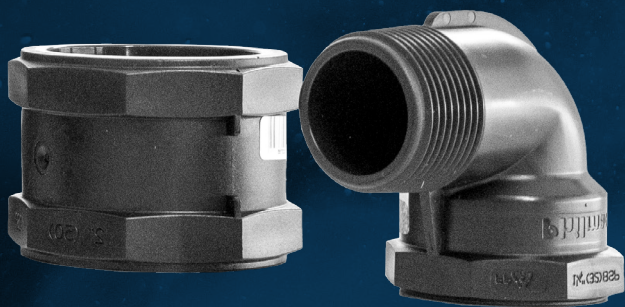

**Contact us to discuss your pipeline project 0800 387 677**



90 Hurlstone Drive, New Plymouth

p: +64 6 769 6373

e: [support@waterworks.co.nz](mailto:support@waterworks.co.nz)

[www.waterworks.co.nz](http://www.waterworks.co.nz)